



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification <sup>7</sup> : <b>H04Q 3/66, 3/00</b>		<b>A1</b>	(11) International Publication Number: <b>WO 00/02400</b>
			(43) International Publication Date: 13 January 2000 (13.01.00)
(21) International Application Number: PCT/EP99/04284 (22) International Filing Date: 21 June 1999 (21.06.99) (30) Priority Data: 9814311.8 1 July 1998 (01.07.98) GB (71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON [SE/SE]; S-126 25 Stockholm (SE). (72) Inventors: HANSEN, Mikael, Højer; Skotterupgade 14 3. th., DK-2200 N Copenhagen (DK). PETERSEN, Rene; Kjeldgaardsvej 31 st.th, DK-2500 Valby (DK). MAHLER, Kim; Birkevej 14, DK-3460 Birkørød (DK). HANSEN, Hans, Grønnebaek; Laessøesgade 1A, 4.tv, DK-2200 N Copenhagen (DK). HORSTMANN, Marianne; Dalsø Park 12, DK-3500 Værløse (DK). KRUM-MØLLER, Svend, Erik; Gartnervang 42 3 tv., DK-4000 Roskilde (DK). (74) Agent: O'CONNELL, David, Christopher; Haseltine Lake & Co., Imperial House, 15-19 Kingsway, London WC2B 6UD (GB).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.          Before the expiration of the time limit for amending the          claims and to be republished in the event of the receipt of          amendments.</i>	

(54) Title: CALL ROUTING DATA MANAGEMENT

## (57) Abstract

A switched network (1) for use in a telecommunications network comprising a plurality of networks (15a..15n), comprises at least one switch (3, 5) for routing traffic to a required destination via another network (9, 11) according to a routing table. The switched network (1) has call routing data management means including: means for monitoring a plurality of parameters associated with the other networks in the telecommunications network; means for determining a routing table for each switch in said network based on the monitored parameters; and, means for controlling the switch or switches according to the determined routing table. The switched network enables the optimal route to be used, and the dynamic nature of the invention

means that upon an event occurring in an operational environment, the central call routing data management unit provides a mechanism for quickly assessing the impact of the change and if necessary, rapidly reconfiguring the network to accommodate the change.

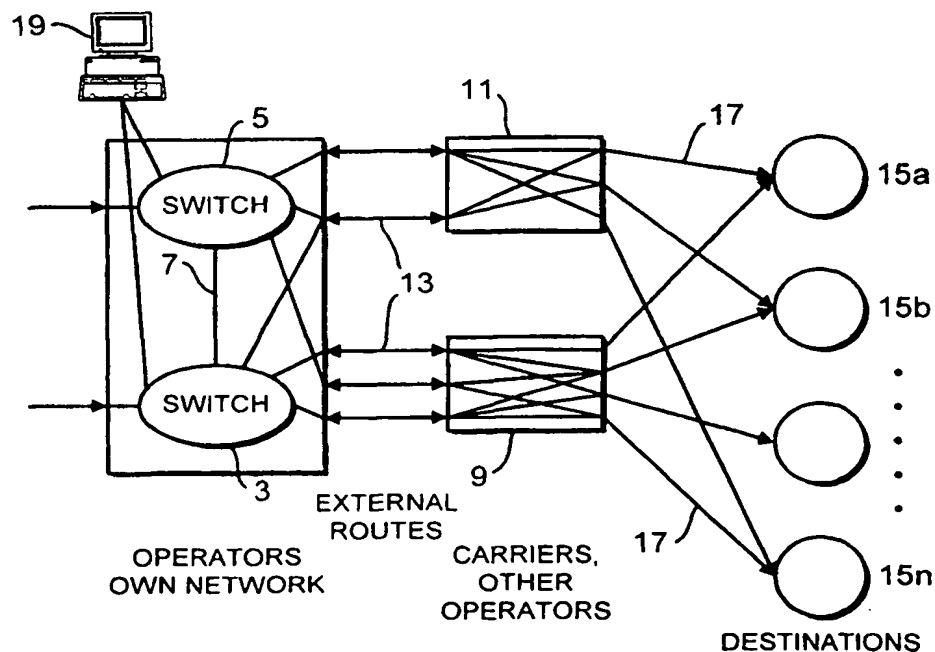

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

CALL ROUTING DATA MANAGEMENTFIELD OF THE INVENTION

5 The invention relates to the routing of traffic in a telephone network, and in particular to the management of switching network systems for telephony and data transmission. It is equally applicable to fixed networks and mobile networks.

BACKGROUND

10 The invention is concerned with routing traffic through a network where a network operator has the choice between more than one carrier.

When a subscriber makes a call, the subscriber uses one operator, but the operator is free to route  
15 the call through other carriers' networks. The operator will choose which other carrier to use based on the tariff charges, amount of traffic, time of day, destination, and so on.

This is particularly true in the case of  
20 international traffic where many operators are forced to make use of other carriers. These operators might not even own a network but lease part of another operator's network. This function is known as International Simple Resale (ISR).

25 As the number of these operators has grown dramatically, the need to support day-to-day processes, by providing fast accurate information that helps them make quality decisions, has become relevant.

Operators currently providing this service manage  
30 their networks manually. They calculate the optimal routing tables for their exchanges and input the data by use of man machine language (MML). Due to the interconnect agreements between the operators it is often profitable to change the routing tables often,  
35 e.g. several times a day, and the changes have to be

-2-

applied to each switching exchange on location.

Calculating the optimal traffic routes and applying the changes to the network therefore requires a large amount of resource. This is due to the  
5 complexity of the calculations, the amount of calculations and the fact that they have to input the new data on location. The calculations are complex because many dynamic parameters are involved. When manual processes are used, the number of dynamic  
10 parameters used is reduced, thereby simplifying the complexity of the calculation. This situation increases the risk for making mistakes.

Another problem is that when managing the routing tables manually, it is difficult to separate the  
15 destinations into small areas. For this reason, a whole country is usually defined as one area, and subscribers are charged the same amount of money no matter where in the country the call is destined. Operators might therefore prefer to divide their  
20 business area into smaller areas and charge subscribers in a more refined way, but then it becomes too demanding to solve manually.

The aim of the present invention is to provide a call routing management system which overcomes the  
25 disadvantages mentioned above.

#### SUMMARY OF THE INVENTION

According to a first aspect of the invention, there is provided a routing network for use in a telecommunications network comprising a plurality of  
30 networks, and in which said routing network has at least one switch for routing traffic to a required destination via another network according to a routing table, wherein said routing network has call routing data management means including: means for monitoring a  
35 plurality of parameters associated with the other

networks in the telecommunications network; means for determining a routing table for each switch in said network based on the monitored parameters; and, means for controlling the switch or switches according to the determined routing table

According to a second aspect of the invention, there is provided a method of routing calls in a routing network for use in a telecommunications network comprising a plurality of networks, in which said routing network has at least one switch for routing traffic to a required destination via another network according to a routing table, the method comprising the steps of: monitoring a plurality of parameters associated with the other networks in the telecommunications network; determining a routing table for each switch in said routing network based on the monitored parameters; and, controlling the switch or switches according to the determined routing table.

#### BRIEF DESCRIPTION OF THE DRAWINGS

For a better understanding of the present invention, and to show more clearly how it may be carried into effect, reference will now be made, by way of example, to the accompanying drawings, in which:-

Figure 1 shows a simplified diagram of a typical network configuration;

Figure 2 shows a call routing system according to the first embodiment of the present invention;

Figure 3 shows in greater detail the carrier selection process of Figure 2;

Figure 4 shows in greater detail the route selection process of Figure 2;

Figure 5 shows in greater detail the Man Machine Language (MML) generation process of Figure 2;

Figure 6 shows a call routing system according to a second embodiment of the present invention;

Figure 7 shows in more detail the steps involved in updating the switch routing tables in figure 6.

DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT OF THE PRESENT INVENTION.

5           Figure 1 shows a simplified network. It comprises an operator's network 1 containing switches 3 and 5. Within the operator's network, the switches are connected by tie routes 7. Although only two switches and one tie route are shown, the operator's network can  
10           comprise any number of switches, and can be configured using various tie arrangements. The operator's network is connected to other carriers or network operators 9 and 11 by external routes 13. Each carrier or operator 9/11 may have switches of its own, and connects to  
15           various destinations 15<sub>a</sub> to 15<sub>n</sub> via Remote Virtual Paths (RVPs) 17. The switches 3 and 5 route calls according to their individual routing tables. These routing tables are updated from a central call routing data management unit 19, as will be described later.

20           Each carrier or network operator 9/11 will have its own pricing structure for the destinations it supports, which can vary by time-of-day and day-of-week. Each carrier will also provide different quality of service levels to different destinations.

25           Figure 2 shows a functional overview of the operation of the invention according to a first embodiment. In the call routing data management unit 19, the optimal carrier selection for each destination is determined in step S1 based on the environmental  
30           parameters that prevail at a particular time, e.g. carrier cost, carrier quality, time of day, amount of traffic, foreign currencies, and so on. A route is then selected in step S2, to pass traffic to the selected carriers from each switch. In step S3, the  
35           call routing data management unit 19 creates a generic

-5-

route case description for each destination on each switch. According to the operation of this first embodiment, a network manager, (being a person responsible for the operator's network), can then use the generic routing case description as work orders for implementing a routing case on a switch which is not supported by the system. The network manager is also able to manually schedule and download the routing case files to each switch in the operator's network, as shown in step S4. The system also has the capability of comparing the actual switch configuration with data in the call routing data management unit 19, as shown in step S5, and identifying any discrepancies between the two.

Each of the elements making up the above embodiment are carried out in the central call routing data management unit 19 (as shown in Figure 1). A more detailed description of the processes involved in each of these elements is given below.

Figure 3 expands on the carrier selection process of figure 2. "Carrier selection" lists in a defined order the carriers that are to be used to carry traffic to a specific destination area during a specific period of a defined day. The purpose of the carrier selection process is to determine whether there has been a change to one or more of the parameters being monitored by the Dynamic Environmental Parameters unit 22 (eg. Interconnect charges, quality status, carries class, etc). If any of these have changed, the carrier selection process determines whether the carrier selection should be changed for a specific destination. According to the first embodiment, the network manager is able to evaluate the impact of the change before approving a new carrier selection.

The configuration of the telecommunications

-6-

network is defined in a network model 24. This specifies how the constituent elements (ie. switches, carriers, other networks, etc) are all arranged. The call routing data management unit 19 provides the network manager with a list of all carriers that are connected via a Remote Virtual Path (RVP) to each destination area. The list is subdivided into various rate bands, and sorted by the interconnection charge recorded for each carrier. The list is known as the "Carrier List".

For each carrier listed, the system provides the following information:

- The Carrier Class as defined by the network manager.
- The active status of the carrier or the Remote Virtual Path. If either one or both of these network objects is marked "Offline" then the status shows "Offline"
- The quality status of the external route or the Remote Virtual Path. The system displays the lowest ranked status associated with both of these network objects.
- The Loop-back Risk Status - the system determines whether there is a risk of loop-back for this carrier due to the existence of a reciprocal agreement to pass traffic to the specific destination area.
- The total capacity of all external routes to the carrier.
- The average occupancy of all external routes to the carrier.
- The forecast estimate of the occupancy of all external routes if the carrier was selected as the primary choice carrier in the carrier selection.



-7-

- A list of the operator switches that are directly connected via an external route to the carrier.

In figure 3, the "carrier selection criteria" process 21 is used to generate and recommend to the network manager a carrier selection. The selection is determined by applying a defined set of criteria to the carrier list. The system supports a default carrier selection criteria, but, if desired, the network manager can also define a carrier selection criteria for a specific destination area.

For example, the network manager can define the following information for each level in the carrier selection criteria:

- An acceptable level of carrier class e.g. minimum of "High".
- An acceptable level of quality as defined by the quality status measure e.g. greater than "Poor".
- An acceptable level of total route occupancy e.g. less than 70% utilised.
- The valid set of switch combinations e.g. the 2nd choice Carrier must be on the same switch as the 1st choice Carrier.

The system has implicit criteria to determine whether the carrier selection has changed as a result of the optimisation process 23 (see below). This is carried out in the change analysis criteria 25.

The network manager can activate the optimisation process 23 at any time. This process performs the following tasks:

- Creates an updated Carrier List
- Creates a recommended Carrier Selection based on the Carrier Selection Criteria 21.
- Determines whether the Carrier Selection has

-8-

changed since it was last evaluated by  
applying the Change Analysis Criteria 25.

- Updates the Change Manager 27 accordingly.

5 The order in which the system performs this process is  
prioritised so that it will firstly optimise the routes  
to destinations that are likely to receive the most  
traffic, and which are likely to provide the highest  
profit margin.

10 Using the above, the network manager is able to  
define the Carrier Selection that he intends to  
implement on all the operator's switches. The network  
manager is able to use the Carrier Selection  
recommended by the call routing data management unit  
19, or create a new Carrier Selection. Whichever  
15 option is chosen, the result is a Carrier Selection 37  
for each destination 15<sub>x</sub>.

Figure 4 shows in greater detail the Route  
Selection Process of figure 2. The purpose of the  
route selection process is to convert the approved  
20 carrier selection for a destination area 15<sub>x</sub> into a  
definition of the tie and external routes to be used to  
physically carry the traffic from each operator switch  
to each carrier selected. A generic routing plan 29  
allows the network manager to define the route  
25 alternatives (a list of tie and external routes in  
order of preference) to be used to carry traffic from a  
specific operator switch to a specific carrier.

For each combination of operator switch and  
carrier, the network manager can define different route  
30 alternatives for the following:

Destination area - This allows the network manager  
to specify different route alternatives to one or a  
group of destination areas. For example, the operator  
may wish to define one set of route alternatives for  
35 Europe and another for the rest of the world.

- 9 -

Route Origin - This allows the network manager to specify different route alternatives depending on one or more incoming routes to an operator switch. This allows the operator to differentiate the routing depending on the source of the traffic.

Random Selection (load sharing) - This allows the network manager to specify different route alternatives for defined percentages of the total traffic volume to a specific destination area. For example, if an operator had two routes to the same carrier, then the network manager could define one route as the primary choice and the other as the secondary choice for 60% of the traffic, and reverse the order for the other 40%.

Auto-routing Process 31 - The network manager can activate the Auto-routing Process 31 at any time for a specific destination area or apply it to all destination areas using a specific approved carrier selection 37 which is awaiting processing.

For each destination area 15<sub>x</sub> affected, this process will raise the relevant route alternatives for each carrier in the carrier selection as stated in the Generic Routing Plan 29, and place them in the correct order into the route selection. At the end of the process there will exist a route selection 35<sub>1</sub>..35<sub>n</sub> for each of the n operator switches for each of the destination areas analyzed.

The network manager can view each route selection 35<sub>1</sub>..35<sub>n</sub> and recommend it for submission to the Man Machine Language (MML) Generation Process via the change manager 27.

If desired, the system can be set-up to allow a different network manager to approve each new Route Selection.

Figure 5 shows in greater detail the Man Machine Language MML Generation Process of figure 2. The

-10-

purpose of the MML Generation Process 43 is to create a generic routing case description to be used as work orders. These are created from the approved route selections  $35_1..35_n$ , in the form of a routing case file  $39_1..39_n$  for each switch. The dynamic MML variables include routing case number, routing case parameters and route parameters. For the routing case number, the network manager can specify a default routing case reference number for each destination area or, if preferred, define a specific reference number for each operator switch and destination area combination. If the default is maintained then the system will generate routing case files with the same reference number to the same destination area for each operator switch.

For each route alternative the system can add a range of route parameters. For example:

- Sending Program
- B-Number Type
- Echo Selection

The network manager can define a default value for each of these parameters and also an alternative value for specific cases.

The network manager can activate the MML Generation Process 43 at any time for a specific destination or apply it to all destination areas with an approved route selection awaiting processing. As mentioned above, the inputs to this process are the route selections  $35_1..35_n$ . The process 43 then generates generic routing case description, in the form of routing case files  $39_1..39_n$ , for each associated switch. A generic routing case description means that the Man Machine Language may not contain all the MML elements required by the operator's switches. Consequently, the routing case descriptions should be reviewed and, if necessary, edited by the network

-11-

manager prior to being downloaded onto the operator's switches.

The network manager can view and edit each routing case file as required via the Change Manager 27.

5           Therefore, in response to one of the monitored parameters changing, the embodiment described above firstly selects the appropriate carrier for each destination, and then determines the routing table that will allow traffic to pass from each switch to the  
10       chosen carrier. Generic routing case descriptions for realising the routing paths are then generated, checked by a network manager, and then downloaded onto each respective switch.

15           A functional overview of the operation of the invention according to a second embodiment is shown in figure 6. Steps one and two are identical to those in the first embodiment described above. The parameters relating to each carrier or network operator are  
20       continually monitored. Based on these monitored parameters, the optimal carrier selection for each destination is determined in step S1 based on the environmental factors that prevail at a particular time. A route is then selected in step S2, to pass  
25       traffic to the selected carriers from each switch. According to the second embodiment, however, the system automatically generates in step S3 the switch MML in the form of a routing case file for each destination on each switch. In addition, the scheduling and  
30       downloading of the routing tables is automatically controlled to each switch in the operator's network, step S4. This updating of the switches may also handle all login security issues, that is, preventing  
35       unauthorised changes to the switch routing. The system also has the capability of comparing the actual switch

-12-

configuration with data in the management system, as shown in step S5, and identifying any discrepancies.

Figure 7 shows in greater detail the steps involved in automatically downloading the routing case files to the operators's switches. Having produced the routing case files from the steps discussed above, the central call routing management unit then determines a network loading schedule 45 which identifies the sequence in which routing case files should be downloaded to the switches. The switches 3 and 5 are then updated 47 by downloading the associated routing case files for each switch into the network. The sequence is important and ensures that the routing case for a specific destination is made operative at the furthest point in the operator's network first (or at least at the same time as all other switches). Once the routing case has been downloaded, the central call routing management unit 19 may interpret the responses provided by the switch to ensure the process was successful. Once confirmed, the central call routing management unit can then update its database with the new operative carrier selection.

The invention as described in the embodiments above enables operators to optimise their routing tables. Furthermore, management of the routing tables is much more efficient since they are handled centrally, and the operators are able to optimise their routing tables at any given time.

The dynamic nature of the invention means that upon an event occurring in an operational environment (eg. a carrier provider reducing a tariff, or the quality of a carrier changes), the central call routing data management unit provides a mechanism for quickly assessing the impact of the change and if necessary, rapidly reconfiguring the network to accommodate the

-13-

change.

On-line receival of routing optimisation data means that the system can respond faster to changes in operating parameters. It also allows a greater number of destinations to be used, for example, by dividing destination areas into towns rather than countries.

-14-

CLAIMS

1. A switched network for use in a telecommunications network comprising a plurality of networks, and in  
5 which said switched network has at least one switch for routing traffic to a required destination via another network according to a routing table, wherein said switched network has call routing data management means including:

10 means for monitoring a plurality of parameters associated with the other networks in the telecommunications network;

means for determining a routing table for each switch in said network based on the monitored  
15 parameters; and,

means for controlling the switch or switches according to the determined routing table.

2. A switched network as claimed in claim 1, wherein the means for determining the routing tables  
20 for each switch comprises:

means for selecting the optimal carrier for each destination based on the parameters being monitored; and,

25 means for determining which route to use to pass traffic from each switch to the selected carrier.

3. A switched network as claimed in claim 2, wherein the means for selecting the optimal carrier is triggered in response to one of the monitored parameters changing.

30 4. A switched network as claimed in claim 2 or 3, wherein the carrier selection is based on a defined set of criteria.

5. A switched network as claimed in claim 4 wherein the defined set of criteria are programmable by  
35 a network manager.



-15-

6. A switched network as claimed in any of claims 2 to 5, wherein the call routing data management means creates a generic routing case description for each destination, to assist a network manager in  
5 creating a routing table for each switch.

7. A switched network as claimed in any of claims 2 to 5, wherein the call routing data management means automatically generates the routing table for each switch.

10 8. A switched network as claimed in any preceding claim, wherein each switch has its routing table updated under control of a network manager.

9. A switched network as claimed in any of claims 1 to 7, having means for automatically updating  
15 the routing table in each switch according to a loading schedule.

10. A switched network as claimed in any preceding claim, wherein the parameters are monitored online.

20 11. A method of routing calls in a switched network for use in a telecommunications network comprising a plurality of networks, in which said switched network has at least one switch for routing traffic to a required destination via another network  
25 according to a routing table, the method comprising the steps of:

monitoring a plurality of parameters associated with the other networks in the telecommunications network;

30 determining a routing table for each switch in said routing network based on the monitored parameters; and,

controlling the switch or switches according to the determined routing table.

35 12. A method as claimed in claim 11, wherein the

-16-

step of determining the routing table comprises:

selecting the optimal carrier for each destination based on the parameters being monitored; and,

5 determining which route to use to pass traffic to the selected carrier.

13. A method as claimed in claim 12, wherein selection of the optimal carrier is triggered in response to one of the monitored parameters changing.

10 14. A method as claimed in claims 12 or 13, wherein the carrier selection is based on a defined set of criteria.

15 15. A method as claimed in claim 14 wherein the defined set of criteria are programmable by a network manager.

16 16. A method as claimed in any of claims 12 to 15, wherein the call routing data management unit creates a generic routing case description for each destination, to assist a network manager in creating a routing table for each switch.

20 17. A method as claimed in any of claims 12 to 15, wherein the call routing data management means automatically generates the routing table for each switch.

25 18. A method as claimed in any of claims 11 to 17, wherein the routing tables in each switch are updated under control of a network manager.

30 19. A method as claimed in any of claims 11 to 17, wherein the routing tables for each switch are automatically updated according to a loading schedule generated by the call routing data management unit.

20. A method as claimed in any of claims 11 to 19, wherein the parameters are monitored online.

1 / 3

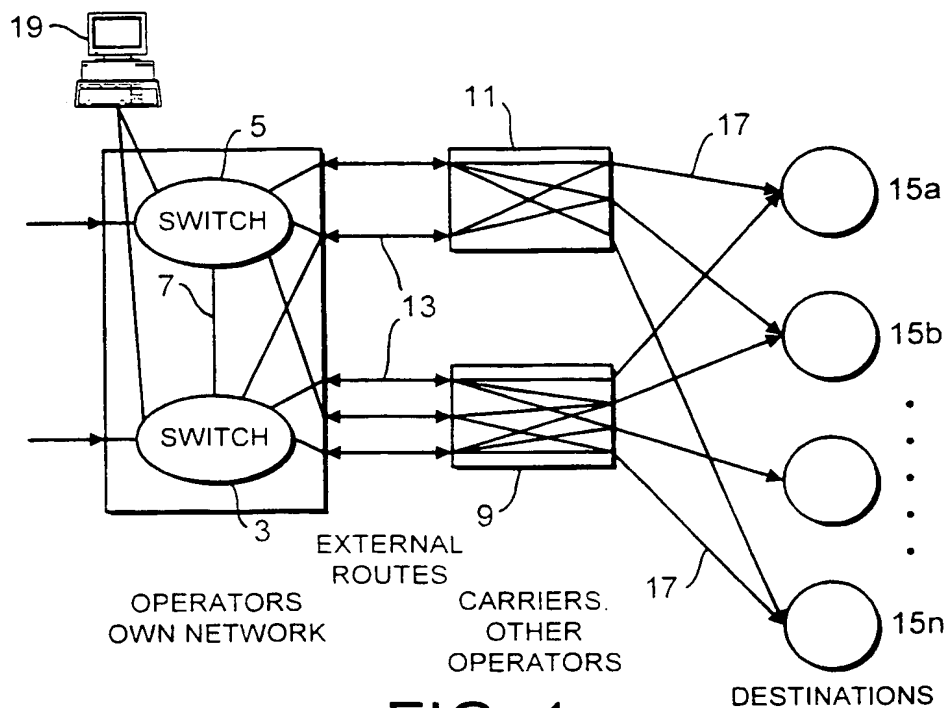


FIG. 1

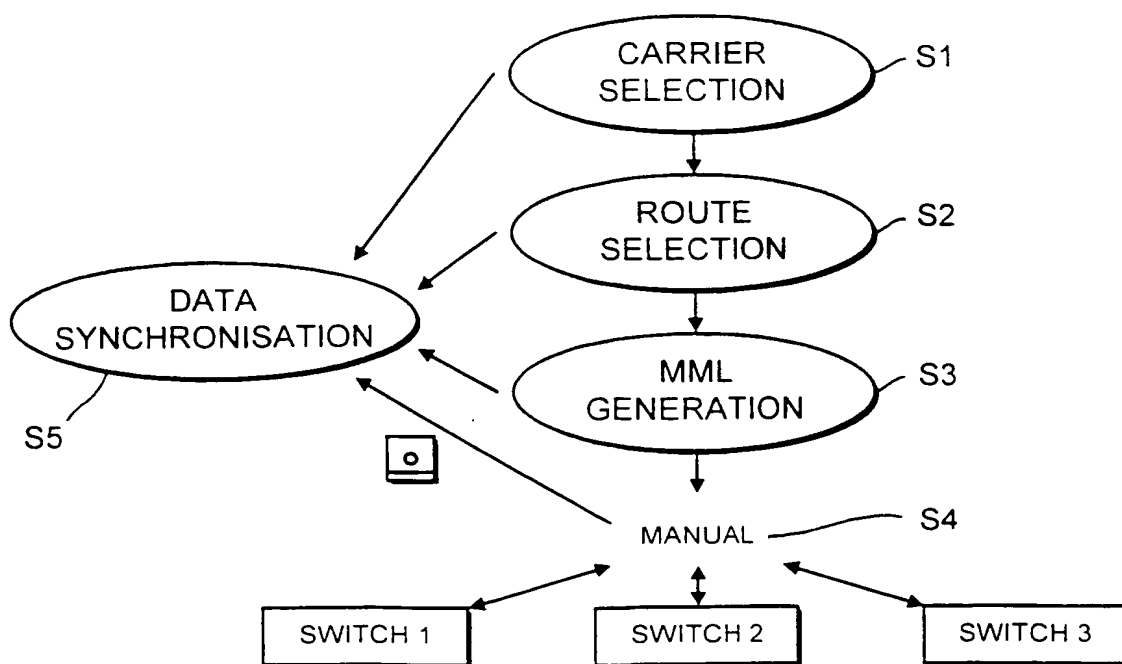


FIG. 2

SUBSTITUTE SHEET (RULE 26)

2 / 3

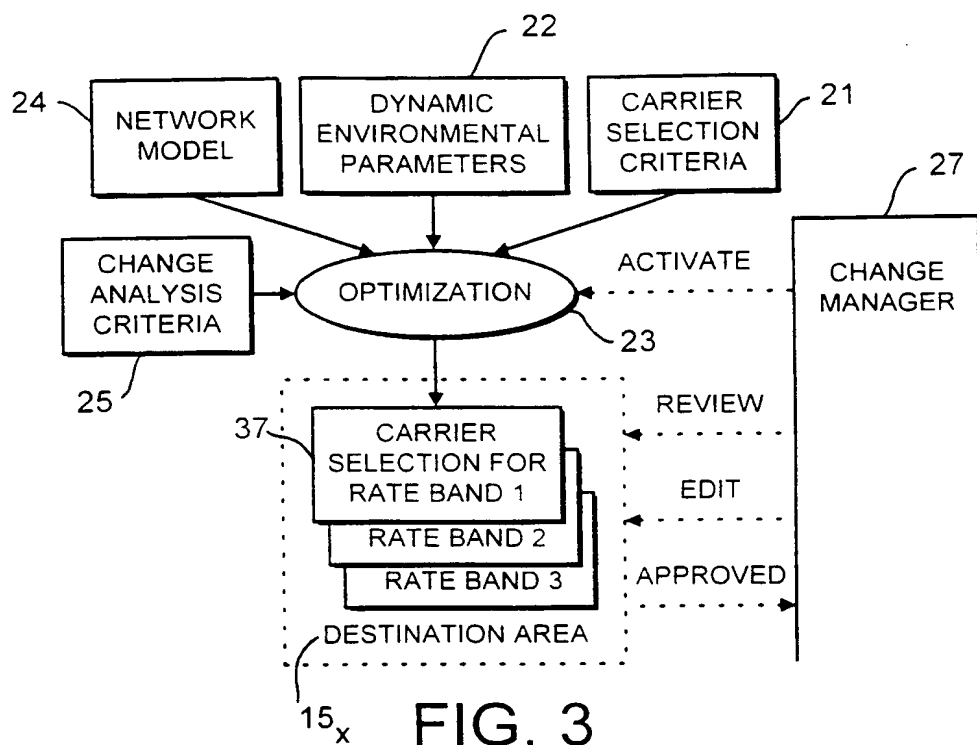


FIG. 3




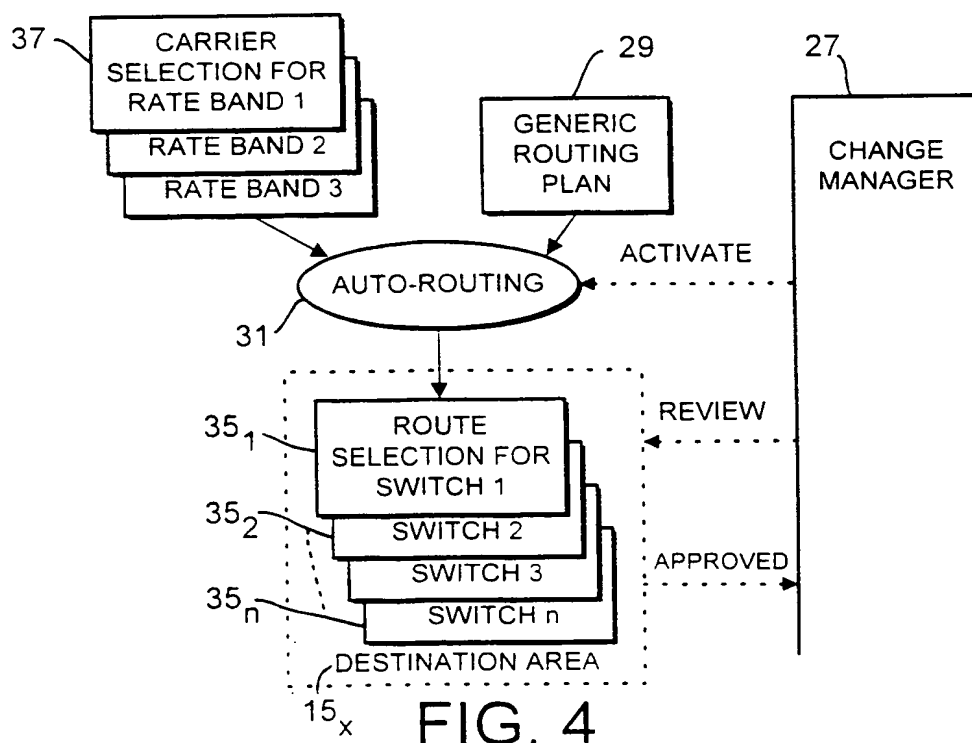


FIG. 4

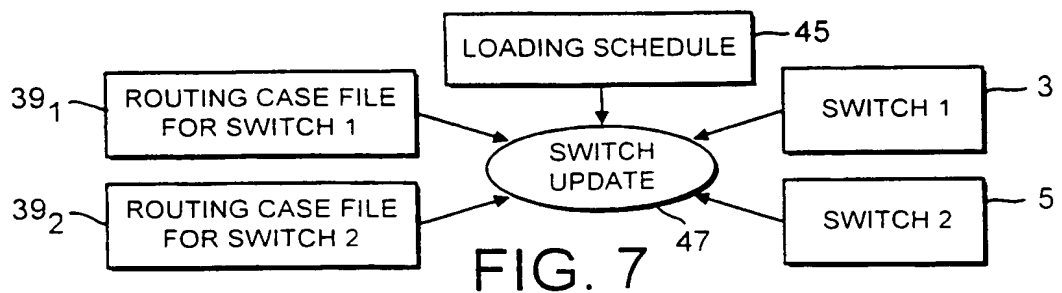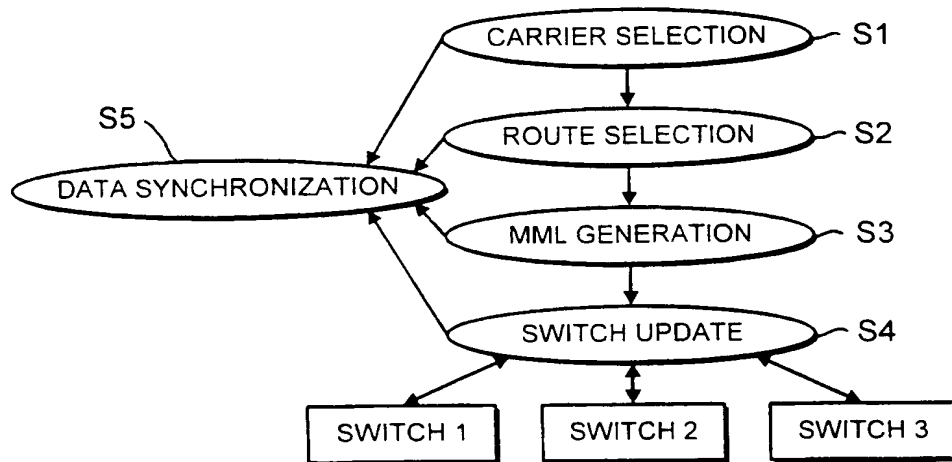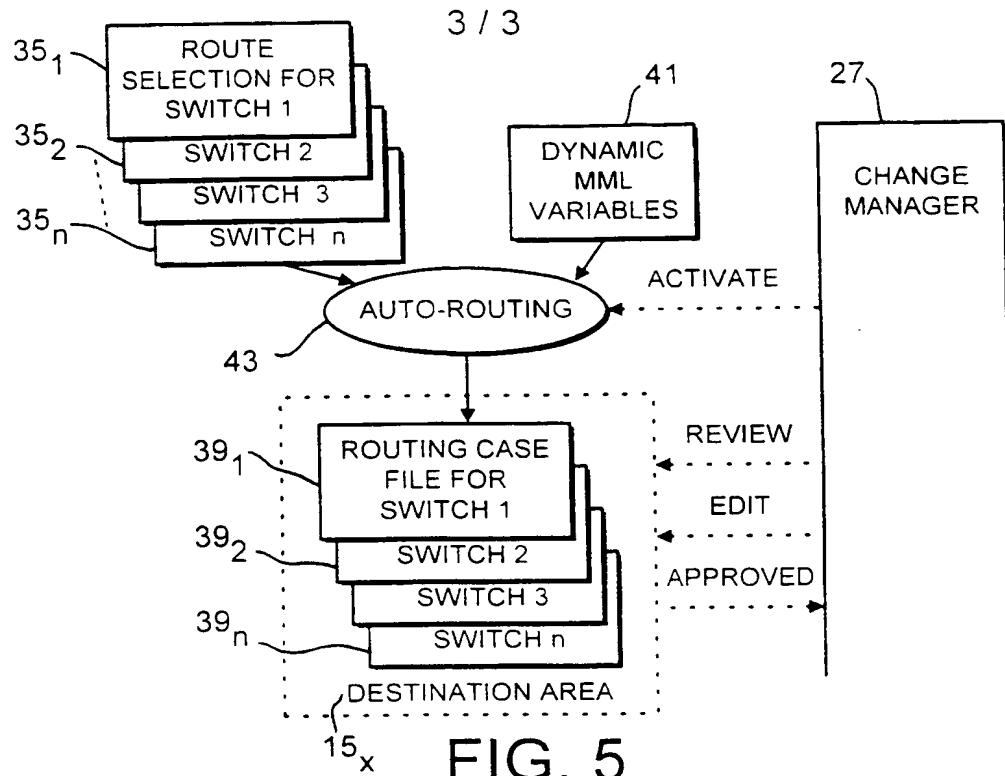

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP 99/04284

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04Q3/66 H04Q3/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 606 602 A (JOHNSON J J ET AL) 25 February 1997 (1997-02-25)  column 1, line 38 -column 2, line 54 column 3, line 17 -column 4, line 40 column 7, line 24 -column 8, line 46	1,2,4-8, 10-12, 14-18,20
Y		3,13
A		9,19
Y	WO 97 05749 A (CALL MANAGE LTD) 13 February 1997 (1997-02-13) page 10, line 14 - line 30 page 21, line 8 - line 9 page 42, line 7 - line 14	3,13
A		1,11
	--- -/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

8 November 1999

Date of mailing of the international search report

22/11/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Vercauteren, S

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 99/04284

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 98 21864 A (CONCERT MANAGEMENT SERVICES INC) 22 May 1998 (1998-05-22) page 1, line 2 -page 2, line 14 ---	1-20
A	US 5 406 620 A (PEI E T) 11 April 1995 (1995-04-11) column 1, line 15 -column 2, line 51 figures 1,2,3A-3C -----	1-20

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 99/04284

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5606602 A	25-02-1997	AU 4511297 A CA 2244114 A EP 0860090 A WO 9717815 A	21-01-1998 15-05-1997 26-08-1998 15-05-1997
WO 9705749 A	13-02-1997	US 5764741 A US 5799072 A AU 705826 B AU 6368396 A CA 2227569 A EP 0865706 A US 5862203 A	09-06-1998 25-08-1998 03-06-1999 26-02-1997 13-02-1997 23-09-1998 19-01-1999
WO 9821864 A	22-05-1998	AU 5354898 A	03-06-1998
US 5406620 A	11-04-1995	AU 677869 B AU 8023694 A CA 2134574 A,C EP 0660623 A JP 7203026 A	08-05-1997 22-06-1995 15-06-1995 28-06-1995 04-08-1995